



» extensometers

Convergence Monitor




RST Instruments Ltd.
200 - 2050 Hartley Ave.
Coquitlam, BC
Canada V3K 6W5

Telephone: 604 540 1100
Facsimile: 604 540 1005
Toll Free: 1 800 665 5599



info@rstinstruments.com

www.rstinstruments.com

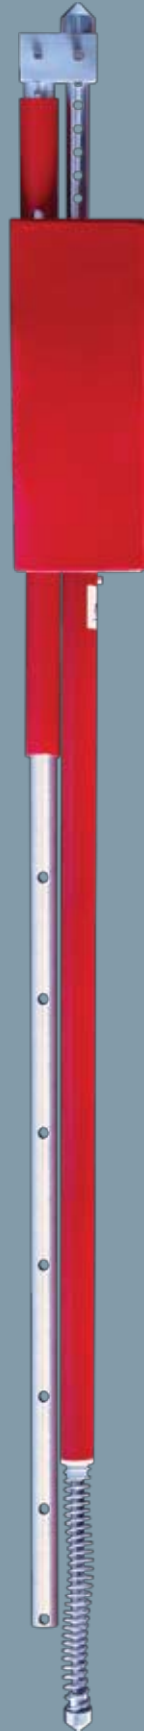

The RST Convergence Monitor is an economical, robust instrument for the continuous or random monitoring of ground closure in mining and civil engineering projects.

The convergence monitor consists of a sensor unit coupled to a lower, spring loaded leg and an upper, adjustable leg. The sensor itself consists of a digital indicator that displays movement in inches or millimeters.

Optionally, the convergence monitor can be modified to include the ability to be remotely read by a datalogger. This is especially useful in applications where continuous monitoring is essential.

specifications

ITEM	SPECIFICATION
Standard Range	150 mm (6 in.) other ranges available.
Resolution	0.01 mm (0.0005 in.)
Span	3.7 m (146 in.) fully extended 2.06 m (81 in.) retracted (custom sizes available upon request).

ordering info

ITEM	PART #
Convergence Monitor	EXCN0001
Groutable Seat Anchor Point (pair)	EXCN0100

applications

- Mine development in squeezing ground.
- Tunneling.
- Remnant mining.
- Roadway intersections.
- Regional subsidence and closure surveys.

features

- Digital indicator with standard range of 150 mm (6 in.).
- Adjustable upper leg with coarse height adjustment, 150 mm (6 in.) increments, and fine height adjustment, 25 mm (1 in.) increments.



RST Instruments Ltd. reserves the right to change specifications without notice.

GEOTECHNICAL . MINING . STRUCTURAL



EXB0003E