




Total Earth Pressure Cell



Total Earth Pressure Cells are designed to measure stress acting on plane surfaces. The TP-101 series Total Earth Pressure Cells are constructed from two circular stainless steel plates, welded together around their periphery. The annular space between these plates is filled with deaired glycol. The cell is connected via a stainless tube to a transducer forming a closed hydraulic system. The stress is then converted to a signal and may be remotely read on a variety of portable readout units or data loggers. Various types of transducers are employed dependent on site requirements.

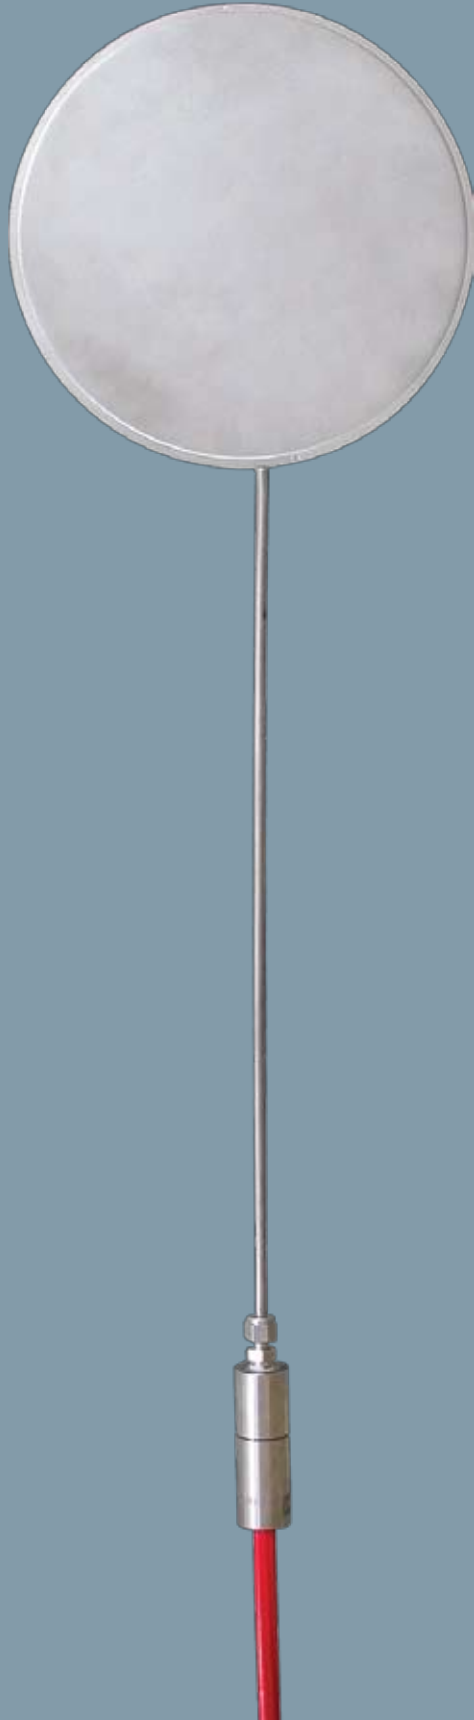

An order of Total Earth Pressure Cells being prepared for shipment.



RST Instruments Ltd.

200 - 2050 Hartley Ave.
Coquitlam, BC
Canada V3K 6W5

Telephone: 604 540 1100
Facsimile: 604 540 1005
Toll Free: 1 800 665 5599



info@rstinstruments.com

www.rstinstruments.com

applications

- Earth embankments dams.
- Foundations, retaining walls, and piles.
- Pipelines and culverts.
- Railroad bases.
- Beneath raft foundations.
- Tunnel linings.
- Mine backfill monitoring.

features

- Long term stability.
- High accuracy and sensitivity.
- Constant monitoring capability.
- Ease of data logging.
- Either pneumatic, strain gauge or vibrating wire transducers.
- The transducer is located 46 cm (18 in.) from the cell to avoid any influence from the transducer housing.
- Stainless steel construction.
- A 20:1 height to diameter ratio minimizes the effects of stress distribution on the mean plane.



specifications + ordering info

Total Earth Pressure Cells



specifications

DESCRIPTION	MODELS		
	LPTPC-P	LPTPC-S	LPTPC-V
Transducer Type	PETUR® Pneumatic	*Silicon Strain Gauge	Vibrating Wire
Range	Up to 13,800 kPa (2000 psi)	Up to 34,500 kPa (5,000 psi)	Up to 34,500 kPa (5,000 psi)
Overrange	2000 psi maximum	200 - 500% F.S. dependent on the sensor	200% F.S.
Accuracy	.25 or .15% F.S.	To ± 0.1% F.S. dependent on the sensor	0.1% F.S.
Resolution	Equal to readout instrument	Infinite	0.025% F.S. minimum
Excitation Voltage	n/a	Dependent on sensor	5 V sq. Wave
Signal Output	n/a	0-100 mV 0-1 V 0-5 V	4-20 mA 1200 - 2000 Hz
Conductor	2 X 3/16 O.D. Pneumatic Tubes	4 X #20	2 X #20
Operating Temperature	-40° to +40°C -40° to +105°F	-40 to +120°C -40 to +250°F	-29° to +65°C -20° to +150°F

*Various types of strain gauge transducers are available, as preferred.

ordering info

TRANSDUCER	STANDARD CELL DIAMETER	PART #
Pneumatic	11.4 cm (4.5 in.)	LPTPC04-P
Pneumatic	24.1 cm (9.5 in.)	LPTPC09-P
Pneumatic	31.7 cm (12.5 in.)	LPTPC12-P
Silicon Strain Gauge	11.4 cm (4.5 in.)	LPTPC04-S
Silicon Strain Gauge	24.1 cm (9.5 in.)	LPTPC09-S
Silicon Strain Gauge	31.7 cm (12.5 in.)	LPTPC12-S
Vibrating Wire	11.4 cm (4.5 in.)	LPTPC04-V
Vibrating Wire	24.1 cm (9.5 in.)	LPTPC09-V
Vibrating Wire	31.7 cm (12.5 in.)	LPTPC12-V

optional

- Temperature measurement (requires 2 additional conductors).
- Integral pore pressure measurement.
- Special mounting modifications such mounting ears (3 or 4 tabs).
- Custom sizes and shapes.
- Data Trapper Logger.
- Terminal stations.

accessories

- Portable readout instruments.
- Single channel data acquisition systems.
- Multi channel data acquisition systems.
- Readout terminal stations.

ordering info

- Part number.
- Pressure range requirements.
- Cable length.
- Optional equipment.



GEOTECHNICAL . MINING . ENVIRONMENTAL . STRUCTURAL